


PIN+ FIDO2 NFC and Contact Card Release3.3

Part no: T2F2CardRel3.3 · T2-105

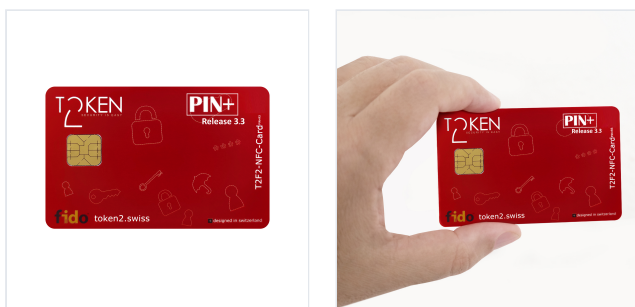

Description

The **PIN+ FIDO2 NFC and Contact Card Release3.3** from Token2 is an NFC smart card that fully supports the FIDO2.1 and FIDO U2F standards, featuring PIN complexity enforcement at the firmware level. This card provides a simple yet robust authentication solution for cloud and web applications. With its versatility, professionals can easily implement secure authentication on both mobile and desktop platforms. Release3.3 allows you to store up to 300 passkeys (also known as resident keys or discoverable credentials) on a single device.

Firmware 3.3 Release

Version 3.3 adds [PIV functionality](#) to the existing features.

Specifications

Model Number	Token2 PIN+ FIDO2 NFC and Contact Card Release3.3
Button	None (replaced by tapping on an NFC reader)
Functions	FIDO U2F + FIDO2.1 WebAuthn + PIV
OpenPGP	RSA2048, RSA3072, RSA4096 secp256r1, secp256k1, secp384r1, secp521r1 ed25519, x25519 User Interaction Flags (UIF), Key Derived Function (KDF)
SSH with FIDO Support	ecdsa-sk & ed25519-sk
Embedded security algorithm	ECDSA, SHA256, AES, HMAC, ECDH

Interface type	NFC (Contactless), Smart Card Contact interface
Firmware	FIDO 2.1 + PIV support ^{Token2} PIN complexity enforcement
Maximum FIDO2.1 Resident keys	300
Lifetime	At least 10 years
Programming cycles	100,000 times
Communication protocol	CTAP2 via NFC or Smart Card contact
Working temperature	-10°C - 50°C
Dimensions	85.6 mm x 53.98 mm x 1 mm
Storage temperature	-20°C - 70°C

While the **PIN+ FIDO2 NFC and Contact Card Release3.3** is designed for both mobile and desktop environments, desktop systems require an NFC or Smart Card Reader. For optimal performance, we recommend using the [Token2 NFC Writer](#) or the [T2SR Smart Card Reader](#).

Specifications

GENERAL	
Form factor	Card
Interface	NFC, SmartCard
CONNECTIVITY	
NFC	Yes
Smart card	Yes
OTP	
OTP protocols	TOTP
TOTP	Yes
FIDO	
U2F	Yes
FIDO certification	L2
Minimum PIN policy	6 digits, complexity enforced
OpenPGP support	Yes

PIV support	Yes
PHYSICAL	
Dimensions	85×53×1